

KAPTAN

It's a radiator, but not as we know it. This innovative set of horizontal bars displays true class with its satin finish and unrivalled performance. A perfect example of what we do best.


i Model shown on opposite page: KA24-S (brushed matt)

KAPTAN

SS MATERIAL
 10 WORKING PRESSURE
 120°C WORKING TEMP.
 O C OPEN/CLOSED SYSTEM
 V MOUNT POSITION
 20 YEARS WARRANTY

Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Towel Gaps	Pipes or Sections	Heat Output (BTU/w) ΔT 50		E: Electric only Choice of Elements (Watts)		Finish S: Brushed Matt P: Polished
							2388	699	300	400	
KA18	1040	500	40	E/H/D	5	18	2388	699	300	400	S, P
KA24	1400	500	40	E/H/D	7	24	3183	932	400	600	S, P
KA30	1760	500	40	E/H/D	9	30	3979	1165	600	900	S, P

We recommend the 3 Bar Safety Valve for all ELECTRIC ONLY (E) products. Dual Fuel is possible either by use of "T" piece and radiator valve or by use of ONE850 or ONE851 (4 way valve)

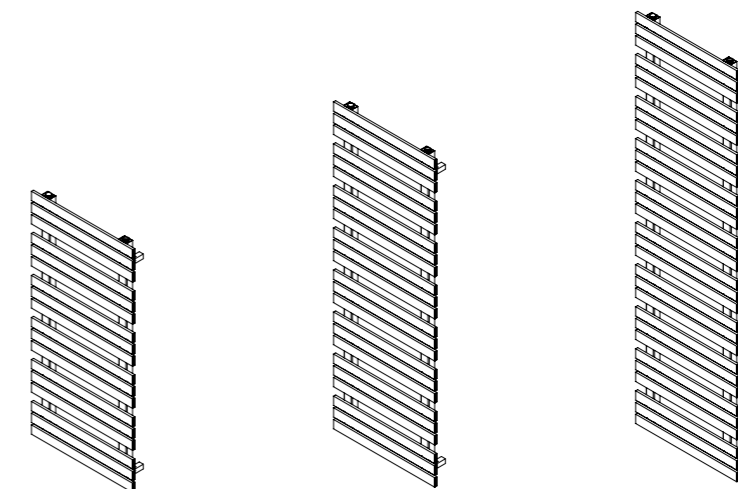

Call us on 01908 271155 or visit www.aeon.uk.com